



**RTR COMPATIBLE**

## Compliance Kiosk

COMPLIANCE, FLEET HEALTH & EVENT COLLECTION

The WatchGas Compliance Kiosk elevates fleet management beyond standard bump and calibration stations. It gives safety managers instant insight into detector readiness, user behaviour, and site compliance. By centralizing daily check-ins and automating data transfer to the SST Range ecosystem, it streamlines workflows and reduces admin work. With smart verification tools, automatic event retrieval, and seamless connectivity, the kiosk provides clear operational oversight and helps companies prevent downtime and maintain a compliant workforce.

## Features and Benefits



### Configuration Verification

The Compliance Kiosk has the capability to check the gas detector's settings such as function settings, alarm limits, and assigned user ID against a system reference file set up by the system administrator. This allows the system to validate that the unit is set up correctly and that a calibration or bump test has been performed in accordance with the company's safety process.



### Health Check

The Compliance Kiosk reads the product health and reports it to the WatchGas RTR Compliance Solution, providing a unique preventive maintenance schedule and reducing downtime. The data includes battery status, sensor status, hardware, and firmware status.



### Connectivity

The Compliance Kiosk offers a wide range of connectivity options. It can be set up as a standalone system, where information can be sent via email to a printer, laptop, or phone. If you want the system to be connected, you can connect directly to a Wi-Fi network, or the device can be fitted with a SIM-card to connect to a cellular network. This makes automating reporting to RTR software seamless.



### Action Confirmation

The Compliance Kiosk will alert the user if their detector needs any form of attention such as predictive maintenance, bump, or calibration. The system can verify if a User ID has been assigned to a gas detector and allow updates to be made that will automatically load onto that detector.



### Event Collection

The Compliance Kiosk will automatically download the event log from a gas detector, store it locally, and send it to the RTR Solution if activated (software sold separately), providing a quick and simple overview for management.



### Mounting Options


We understand that different applications require equipment to be located in a variety of environments. The Compliance Kiosk comes with brackets that allow it to be tailored for wall mounting or desktop use.

## Compliance Kiosk & RTR Solution




The Compliance Kiosk is designed to carry out compliance checks of your gas detection fleet or can be used by a service provider with a large customer base to maintain. The kiosk is compatible with the SST1, SST4 (all models), and the SST5, meaning one kiosk can read your entire fleet and reduce your infrastructure costs. It allows users to facilitate regular check-ins without costly calibration or bump stations and to handle simple tasks such as detector location, compliance, and identifying if an alarm event has occurred.

### What does a safety manager want to know:

- Do the monitors work and are they being used?
- Did we have any alarms on-site?
- Are we following the company's safety procedures?
- What is the status of my fleet?
- Will I have unforeseen expenses?



Compliance Kiosk  
pushes data to  
RTR Solution

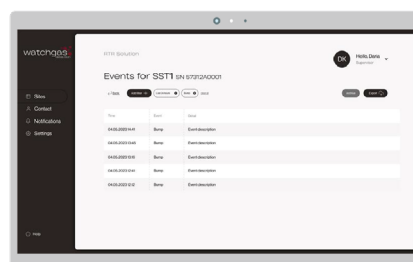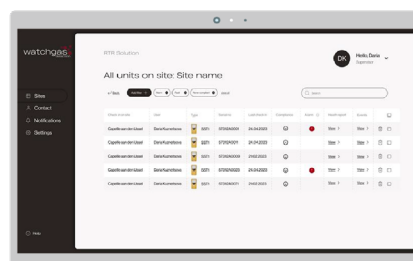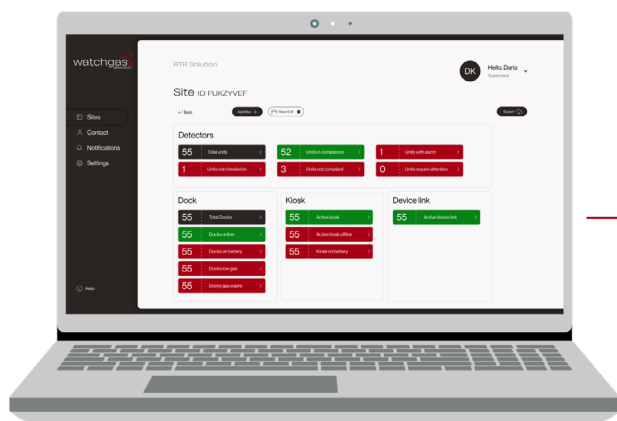

### For more information

www.watchgas.com / www.watchgasusa.com  
info@watchgas.com / info@watchgasusa.com

### WatchGas Compliance Kiosk DS EN V1.2L1E © 2025 WatchGas B.V.

WatchGas is dedicated to continuously improving its products. Therefore, the specifications and features mentioned in this datasheet are subject to change without prior notice.

## Compliance Kiosk Certifications

<b>Dimensions (LxWxH)</b>	28 x 21 x 4 cm (11 x 8.25 x 1.5 in)
<b>Weight</b>	800 g (1.76 lb)
<b>Temperature</b>	+5-40 °C (40-104° F)
<b>Humidity</b>	10% to 90% r.h.
<b>Storage Temperature</b>	0-50 °C (32-122° F)
<b>Power Supply</b>	USB-C 5V
<b>Real Time Clock</b>	Yes, updateable
<b>Data Storage</b>	More than 1 year of operation
<b>Connection Capability</b>	Wi-Fi, Cellular, BLE - Connected into the RTR COMPLIANCE SOFTWARE
<b>Testing Function</b>	Device status
<b>Device Compatibility</b>	One module compatible with SST Range
<b>Certifications &amp; Approvals</b>	EMC Directive 2014/30/EU Low Voltage Directive 2014/35/EU FCC Part 15 RoHS Directive 2011/65/EU RED 2014/53/EU
<b>Warranty</b>	2 years

Distributed by: