

Sensors for use in commercial and light industrial applications, such as laboratories, workshops, hotels, offices, boiler plant rooms, etc. are available for monitoring toxic, flammable, oxygen or refrigerant gases. The gas sensor continuously monitors the atmosphere for hazardous conditions. On detection of gas the sensor will indicate the gas level status A1, A2, A3 by LED indication and sounder. Further actions can be initiated by the alarm relays.



For multi sensor systems the DEFENDER 4 zone alarm panel (part No, 204-000) data sheet C1667 may be used to provide centralised alarm functions.


Key Features

- Sensors pre-set and tested
- Sensor types:
 - toxic/flammable/oxygen/
 - refrigerant/carbon dioxide
- Three pre-set alarm levels (timed ON/OFF option)
- Audible visual alarms & relays
- Designed for ease of installation
- AC mains version

SPECIFICATION

NOT FOR USE IN HAZARDOUS ZONE AREAS	
Sensor Type	FLAMMABLE – catalytic TOXIC, OXYGEN – electrochemical REFRIGERANT – semiconductor CO ₂ – infrared
Power Supply	18 to 30vDC optional 90~260vAC
Consumption	1.2 W
Alarm Relays	Signal Relay: 1 SPCO volt free contact 3A @ 230vAC Global A1/A2/A3 A2/A3 only option latched/unlatched – selectable N/E – N/D Mains Relay: A2 (mains option only) Permanent mains N/E – N/C Off/on alarm (solenoid valve control)
Indicators	Power (Green LED) Gas alarm – Green LED to Red
Alarm 1	– slow flash + intermittent sounder
Alarm 2	– rapid flash + high rate sounder
Alarm 3	– constant + constant sounder Fault – Amber + constant sounder
Sounder	85dB @ 10cm Permanent mute option
Ambient Temp	Operation: -5 to +50°C Storage: +5 to +55°C
Protection	Standard Sensor – IP42 Weatherproof – IP64
Dimensions	Standard: (L) 83mm x (H) 83mm x (D) 36mm Weatherproof: (L) 145mm x (H) 145mm x (D) 60mm Defender Sensor Mains Kit (Type 1) Surface Mount: (L) 85mm x (H) 85mm x (D) 68mm Defender Sensor Mains Kit (Type 2) Dry Lining Box (L) 85mm x (H) 85mm x (D) 74mm
Options	Duct sensor probe – (L) 27mm x 28mm diameter

Alternative use

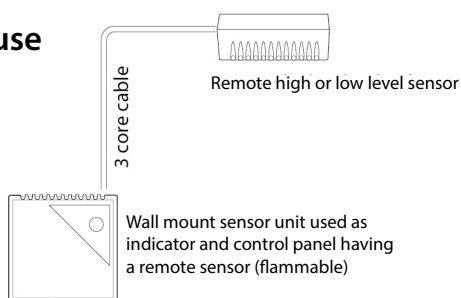

Options



24vDC surface or dry lining box mount



Defender Sensor Mains Kit:
Type 1 – Surface Mount



Defender Sensor Mains Kit:
Type 2 – Dry Lining Box



Surface Mount with Duct Probe



Surface Mount Sensor – Weatherproof



Duct Mount (Probe) – Weatherproof



Remote Sensor (Flammable Gases)



Din Rail Mount



Sensor Stand Alone Power Supply



Defender 4 Zone Alarm Panel



For more information

www.watchgas.com

info@watchgas.com

Distributed by